




Roughneck Combination Pliers are manufactured from high quality steel, drop forged and heat treated for strength and durability. Specially designed tri-grip jaws with induction hardened cutting edges. Comfort grip handles are spring loaded for efficiency and convenience. Designed for gripping, twisting and cutting wires and cables. Conforms to DIN ISO 5746

- Tri-grip jaws
- Induction hardened cutting edges
- Drop forged
- Heat treated
- Spring loaded
- Comfort grip
- Lanyard holes

#### Cutting capacities:

10-110: medium hard wire: 3.1mm, hard wire: 2.0mm, piano wire: 1.6mm 10-114: medium hard wire: 3.8mm, hard wire: 2.5mm, piano wire: 2.0mm



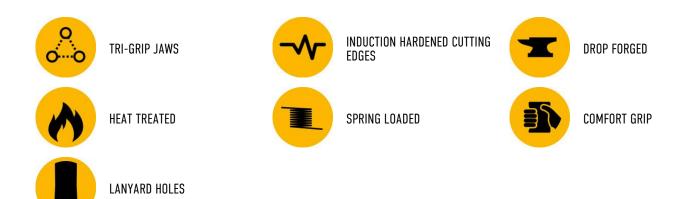

#### **PRODUCT OVERVIEW**

CODE	DESCRIPTION	SIZE	WEIGHT	BARCODE	COMMODITY CODE
10-110	Combination plier	160mm/6½"	-	5 057902 101101	82032000 00
10-114	Combination plier	200mm/8"	-	5 057902 101149	82032000 00

#### **ADDITIONAL INFORMATION**

#### DESCRIPTION





# SINGLE ITEM DIMENSIONS

OT CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (g)
10-110	165.0	55.0	-	239.0
10-114	213.0	58.0	-	366.0

# WASTE PACKAGING DETAILS

OT CODE	PAPER & CARD (g)	PLASTIC (g)	METAL (g)
10-110	-	-	-
10-114	-	-	-

## **INNER CARTON DIMENSIONS**

#### OT CODE GROSS WEIGHT (g) PACK QTY LENGTH (mm) WIDTH (mm) DEPTH (mm) NET WEIGHT (g) 10-110 ------10-114 ------

## SHIPPING CARTON DIMENSIONS

OT CODE	LENGTH (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (g)	GROSS WEIGHT (g)	CARTON QTY
10-110	-	-	-	-	-	-
10-114	-	-	_	-	-	-

# **PRODUCT SAFETY INFORMATION**



WEAR EYE PROTECTION



WEAR EYE PROTECTION

## GUARANTEE



This ROUGHNECK® product includes a 25-Year Guarantee. This covers faulty materials or manufacturing defects, excluding normal wear and tear, consumable parts or customer misuse. Damaged or faulty items can be returned to the place of purchase for replacement. This guarantee is in addition to and in no way prejudices the users statutory rights.

# PACKAGED ITEM DIMENSIONS

OT CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (g)
10-110	165.0	55.0	-	239.0
10-114	213.0	58.0	-	366.0